

# DENSIFIER

## EPS Densification System

Loose EPS Foam  
truckload weights of  
2,000 lbs.\*



Baled EPS Foam  
truckload weights of  
6,000 lbs.\*



\* Truckload weights listed are approximate

Densified Foam truckload weights of up to 40,000 lbs.\*

Eliminates pentane gas dangers

Reduced storage requirements

900 - 1,300 lbs. per hour with 1.5# EPS

Reduced hauling/handling costs

Superior performance

Minimal maintenance

15 - 22 lbs.  
per cubic ft.



### Product Testing Available



### Model D120

Also available in Model D30 for lighter volume demands

Call Today

1-800-253-0532 Toll Free US

1-269-793-7183 Phone



Bright Technologies,  
Specialty Equipment div. of Sebright Products, Inc.  
127 N Water St.  
Hopkins, Michigan 49328  
800-253-0532 Toll Free US  
269-793-7183 Phone  
269-793-4022 Fax

Working together to provide  
complete recycling and  
waste processing solutions



The Densification Specialists



Sebright

Stationary Compactors  
Self-contained Compactors  
Precrushers  
Hydraulic Cart Dumpers, Custom Carts and Containers


Bright

Belt Filter Presses  
High Density Extruders  
Xtractors  
EPS Foam Densifiers

For more information, please visit our websites at  
[www.sebrightproducts.com](http://www.sebrightproducts.com) and  
[www.brightbeltpress.com](http://www.brightbeltpress.com)

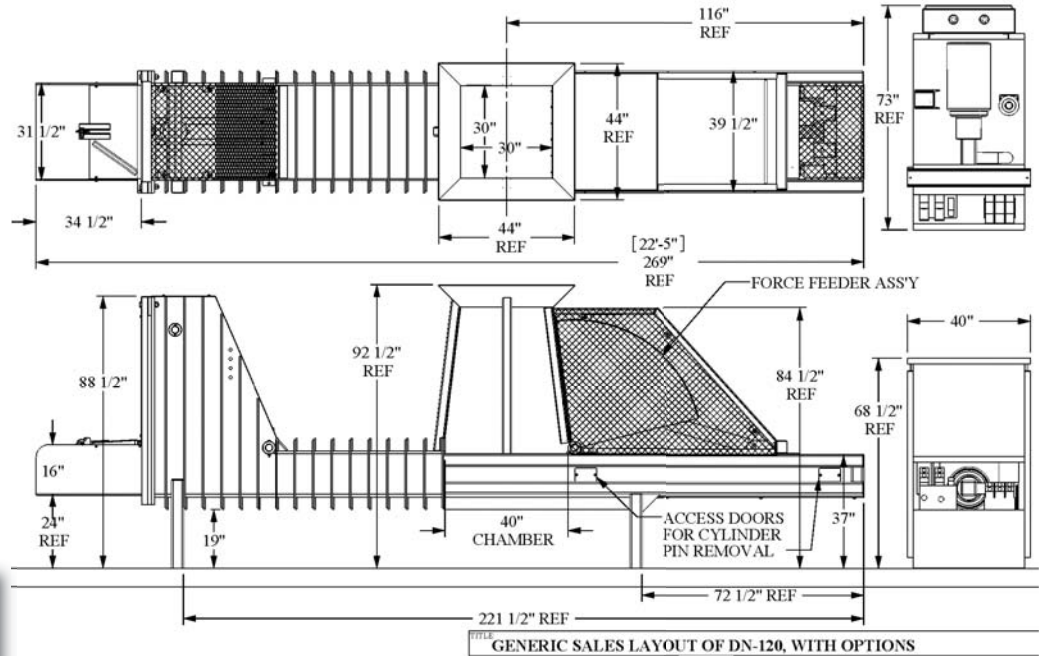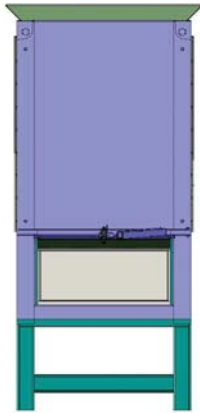

Or Ship This

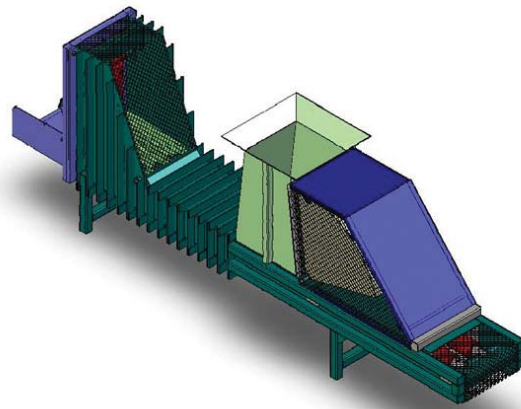

<b>Chamber Volume</b>	<b>Motor</b>	<b>Cylinders</b>	<b>Ram Force</b>	<b>Total Force</b>
9.02 ft <sup>3</sup> or .334 cu yards	30 HP	(2) 7" Diameter	495 PSI	192,000 lbs.
<b>Feed Capacity using 1.5# EPS</b>	<b>Volume Compaction Ratio</b>	<b>Output Density</b>	<b>Machine Weight</b>	<b>Power Unit Weight</b>
900 - 1,300 lbs./hr	Up to 50:1	16 - 22 lbs./ft <sup>3</sup>	10,000 lbs.	1,890 lbs.

**Available options include:**

- elevation stands
- blower systems
- bag house assemblies
- discharge snout extensions
- customized EPS foam pre-breakers
- automated block shears



Due to product improvements, the manufacturer reserves the right to alter or amend, without notice, any of these specifications and/or dimensions.

All machines and accessories are primer coated and finish painted. Standard color chart available upon request.

© Sebright Products, Inc. 2008

